

APEX MAIN EMS STATION

6950 APEX BARBECUE ROAD, APEX, NORTH CAROLINA 27502 | WAKE COUNTY REQUEST FOR BIDS NUMBER: RFB-23-080

ADDENDUM NO. 3

DATE: OCTOBER 23, 2023

BID DATE, TIME, AND LOCATION HAVE NOT BEEN CHANGED.

REMINDER: THE 00300 - BID PROPOSAL FORM - SINGLE PRIME GENERAL CONSTRUCTION WAS REVISED AND REISSUED IN ADDENDUM NO. 1. PLEASE BE SURE TO USE THE REVISED FORM INCLUDED IN ADDENDUM NO. 1. THE UPDATED FORM INCLUDES A **RED 10/17/23 REVISION DATE** WITHIN THE DOCUMENT FOOTER TO DISTINGUISH THEM FROM THE PREVIOUSLY PROVIDED (NOW VOID) VERSION.

GENERAL:

This addendum forms a part of the Contract Documents of the above referenced project and modifies the original Contract Documents as described below. Acknowledge receipt of this Addendum in the space provided on the Form of Proposal Signature Page.

This addendum has been distributed to: all Pre-Bid Conference Attendees, all Contractors that requested Bid Documents from Williard Stewart Architects, and to all Plan Rooms / Plan Services listed in the Notice to Bidders.

This addendum has also been uploaded to the same online file-sharing site used by Williard Stewart Architects to distribute digital PDFs of the Bid Documents for this project:

<https://www.dropbox.com/scl/fo/fsflzahq95okigqw1pcmp/h?rlkey=oxre74go8d5q6qpgim3nd40ej&dl=0>


PROJECT MANUAL:

No Updates / Modifications to the Project Manual and Specifications

DRAWINGS:

SHEET C3.1 – UTILITY PLAN

1. Apex Barbecue Road-To-Ellerview Drive 8x8 Water Service Connection: **REVISE** Detail Key 6/C5.2 at the Apex Barbecue Road-To-Ellerview Drive 8x8 Water Service Connection to read as Detail Key **1/C5.2** (as shown below).

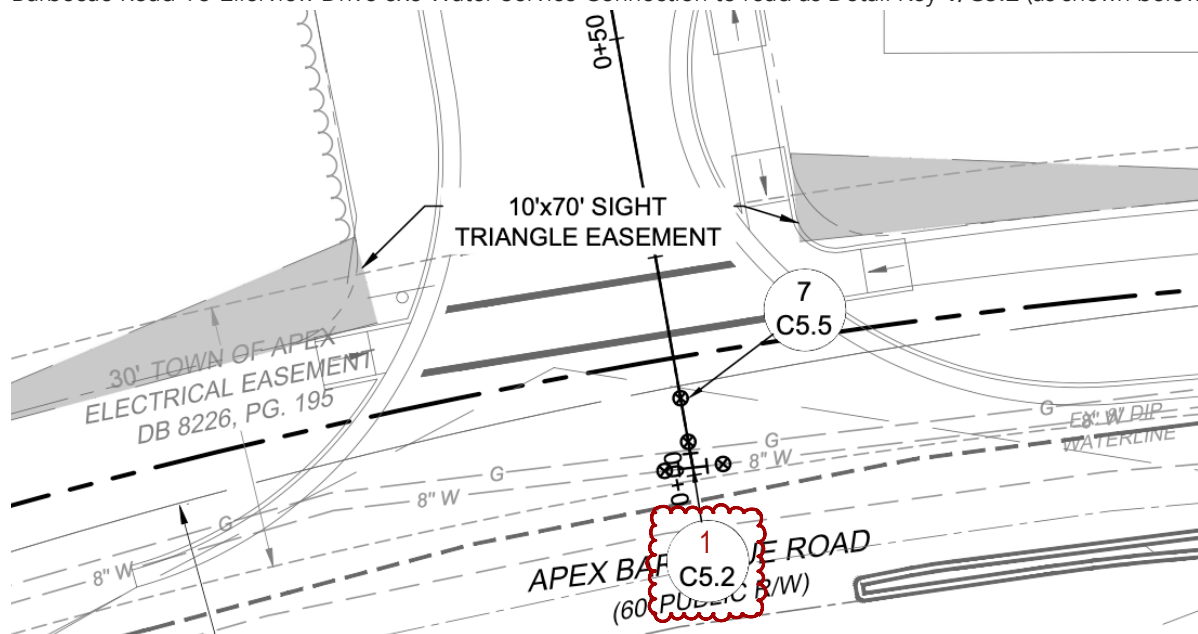

Excerpt from Drawing C3.1 – Utility Plan (Revision 4, Dated 09/25/23)

2. Apex Barbecue Road-To-Ellerview Drive 8x8 Water Service Connection: **CLARIFICATIONS:**

- a. Town of Apex Water Utility will perform closing of existing valves to isolate a section of the 8" WL for the purpose of the 8" WL extension shown for this project.
- b. Town of Apex does not allow size-on-size taps. The required 8x8 water service connection will have to be accomplished by cut in of an 8" mechanical joint "Tee" with proper restraint per Town of Apex Specifications.
- c. The Town of Apex will not guarantee 100% shutdown. Contractor will be responsible for control of any residual water as needed.
- d. Per Town of Apex Specifications, the installation of the Tee and Valves should be organized to be completed in a maximum of four (4) hours.
- e. Per Town of Apex Specifications, all Waterline Pipe, Tee, and Valves shall be fully disinfected by swab method just prior to install.
- f. Per Town of Apex Specifications, only Town of Apex personnel will operate existing valves and perform needed flushing at completion of the install in order to place isolated section back into service.

ATTACHMENTS:

- No Attachments

END ADDENDUM NO. 3

Submitted by: **Paul Stewart, AIA**
Williard Stewart Architects, PA
122 Cox Avenue | Raleigh, North Carolina, 27605
paul@wscarchitects.com
(919) 740-5521 | (919) 834-2149 (Fax)

CC: General Contractor Distribution List
Attendees of October 5, 2023 General Contractor Non-Mandatory Pre-Bid Meeting
Plan Room / Plan Services (Carolinas AGC, Dodge Data & Analytics, HCAC, CMD Group, Construct Connect, NCIMED)
Contractors and Subcontractors that Requested Project Documents from WSA (Various)
Wake County Facilities Design & Construction
Design Team (Timmons Group, Dewberry)
File