

GENERAL NOTES:




1. ALL UNDERGROUND UTILITIES LOCATED AS APPROXIMATE. CONTRACTOR TO FIELD VERIFY PRIOR TO CONSTRUCTION. ALL EXISTING UTILITIES TO BE LEFT UNDISTURBED SHALL BE PROTECTED AND REMAIN ACTIVE.
2. ALL CONSTRUCTION AND MATERIAL SPECIFICATIONS SHALL CONFORM TO THE PROJECT DRAWINGS AND SPECIFICATIONS, WCPSS DESIGN GUIDELINES (2018) AND TOWN OF WAKE FOREST STANDARDS AND SPECIFICATIONS.
3. THE CONTRACTOR IS RESPONSIBLE FOR ALL LAYOUT WORK REQUIRED TO PROPERLY CONSTRUCT THE WORK. CONSTRUCTION STAKING MUST BE PERFORMED BY A N.C. PROFESSIONAL LAND SURVEYOR.

DEMOLITION NOTES:


1. THE CONTRACTOR MAY INSTALL ORANGE CONSTRUCTION FENCING, CONSTRUCTION CONES AND/OR BARRICADES AROUND CONSTRUCTION AREA DURING CONSTRUCTION ACTIVITIES. REFER TO DETAIL 1 ON C501.
2. CONCRETE SIDEWALK/PAVEMENT DEMOLITION EXTENTS SHOWN IS APPROXIMATE. CONTRACTOR SHALL REMOVE ADDITIONAL SIDEWALK/PAVEMENT AS NECESSARY TO CONSTRUCT NEW WORK. CONTRACTOR SHALL SAWCUT TO THE NEAREST JOINT TO LEAVE A CLEAN, NEAT EDGE.
3. CONCRETE CURB & GUTTER DEMOLITION EXTENTS SHOWN IS APPROXIMATE. CONTRACTOR SHALL REMOVE ADDITIONAL CURB & GUTTER AS NECESSARY TO CONSTRUCT NEW WORK. CONTRACTOR SHALL SAWCUT TO THE NEAREST JOINT TO LEAVE A CLEAN, NEAT EDGE.
4. THE EXISTING WEEP HOLES/DRAINS AS SHOWN IN THIS AREA WERE NOT ABLE TO BE TRACED AND/OR LOCATED DURING THE TIME OF THE SURVEY. PRIOR TO EXCAVATING AND/OR WALL DEMOLITION ACTIVITIES, CONTRACTOR SHALL INVESTIGATE TO DETERMINE THE LOCATION AND EXTENT OF THE EXISTING WEEP HOLES/DRAINS. ONCE THE CONTRACTOR HAS INVESTIGATED THE WEEP HOLES/DRAIN, WE RECOMMEND THAT THEY NOTIFY THE ENGINEER TO CONFIRM IF THE WEEP HOLES/DRAINS ARE TO BE RE-ROUTED OR IF THEY CAN BE REMOVED. EXISTING WEEP HOLES THAT ARE NO LONGER NEEDED SHALL BE REMOVED. CONTRACTOR IS RESPONSIBLE FOR PROTECTING ALL EXISTING WEEP HOLES AND/OR DRAIN PIPES THAT EXTEND BEYOND THE NORTH OF WALL THAT ARE TO REMAIN AND BE RE-ROUTED THRU THE NEW WALL. CONTRACTOR SHALL RE-ROUTE ALL WEEP HOLES/DRAIN THAT ARE REQUIRED TO REMAIN.
5. USE EXTREME CAUTION WHEN EXCAVATING BEHIND THE EXISTING WALL AND SURROUNDING AREA. CONTRACTOR IS RESPONSIBLE TO PROTECT THE EXISTING UTILITIES TO THE GREATEST EXTENT POSSIBLE.
6. EXISTING TREES AND/OR VEGETATION SHALL BE REMOVED IN ITS ENTIRETY UNLESS OTHERWISE NOTED. THIS INCLUDES THE STUMP BASE AND ROOTS. CONTRACTOR SHALL REMOVE AND DISPOSE OF EXISTING VEGETATION AS SHOWN. IN ADDITION, ANY ROOTS PROTRUDING ON THE SURFACE AREA SHALL BE REMOVED OR GRINDED SO GRASS MAY BE ESTABLISHED. THE CONTRACTOR TO USE CAUTION WHEN GRINDING IN THE AREA TO AVOID DAMAGE TO ANY EXISTING UTILITIES.

CONSTRUCTION NOTES:

1. PRIOR TO CONSTRUCTION AND MOBILIZATION, CONTRACTOR SHALL SUBMIT A FULL SCHEDULE INCLUDING ANY PHASING TO THE OWNER FOR APPROVAL INDICATING THE WORK AREA AND DURATION OF EACH DAY SO CONSTRUCTION ACTIVITIES ARE PROPERLY COORDINATED FOR EACH DAY. THE OWNER REQUIRES 72 HOUR NOTICE OF ALL CONSTRUCTION ACTIVITIES.
2. THE CONTRACTOR SHALL ENSURE CONSTRUCTION ACTIVITIES DO NOT INTERFERE WITH THE OPERATIONS CONDUCTED AT SURROUNDING BUILDINGS AND PARKING AREAS UNLESS OTHERWISE AUTHORIZED TO DO SO BY OWNER.
3. CONTRACTOR SHALL NOT BLOCK ACCESS TO EXISTING BUILDINGS, DRIVES OR PARKING AREAS UNLESS OTHERWISE AUTHORIZED TO DO SO BY OWNER.
4. ALL ROADS, DRIVES AND WALKS SHALL BE KEPT FREE OF DIRT AND DEBRIS AT ALL TIMES.
5. CONTRACTOR SHALL REPAIR ALL EXISTING SITE FEATURES INCLUDING PAVEMENT, DRIVES, CONCRETE CURB & GUTTER AND SIDEWALKS TO EXISTING OR BETTER CONDITION IF DISTURBED DURING CONSTRUCTION.
6. CONTRACTOR SHALL LIMIT HIS WORK TO THE AREA APPROVED PER THE CONSTRUCTION SCHEDULE. ALL OTHER WORK AREAS WILL NOT BE PERMITTED.
7. CONTRACTOR MAY USE PROPER TRAFFIC CONTROL DEVICES INCLUDING ORANGE CONSTRUCTION FENCING TO BLOCK OFF THEIR CONSTRUCTION AREA AND ACTIVITIES TO PEDESTRIANS AND TRAFFIC. THE CONTRACTOR SHALL USE MEANS TO COVER ALL OPEN TRENCHES IN WHICH THE WORK IN EXCAVATED TRENCHES IS NOT COMPLETE. REFER TO DETAIL 1 ON C501.
8. THE CONTRACTOR'S STAGING/LAYDOWN AREA WILL BE LOCATED ONSITE. THE LOCATION WILL BE PROVIDED TO THE CONTRACTOR PRIOR TO COMMENCEMENT OF FIELD CONSTRUCTION. PRIOR TO MOBILIZATION, THE CONTRACTOR SHALL INDICATE THE AREA NEEDED FOR THE PROJECT AND DURATION AND SUBMIT TO OWNER FOR REVIEW AND APPROVAL.

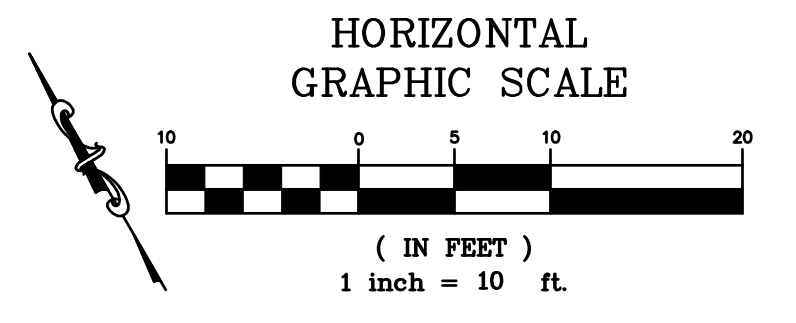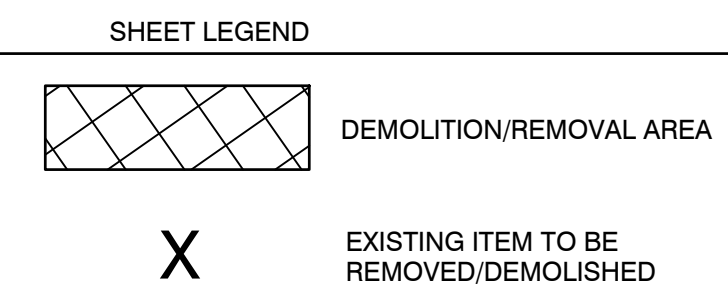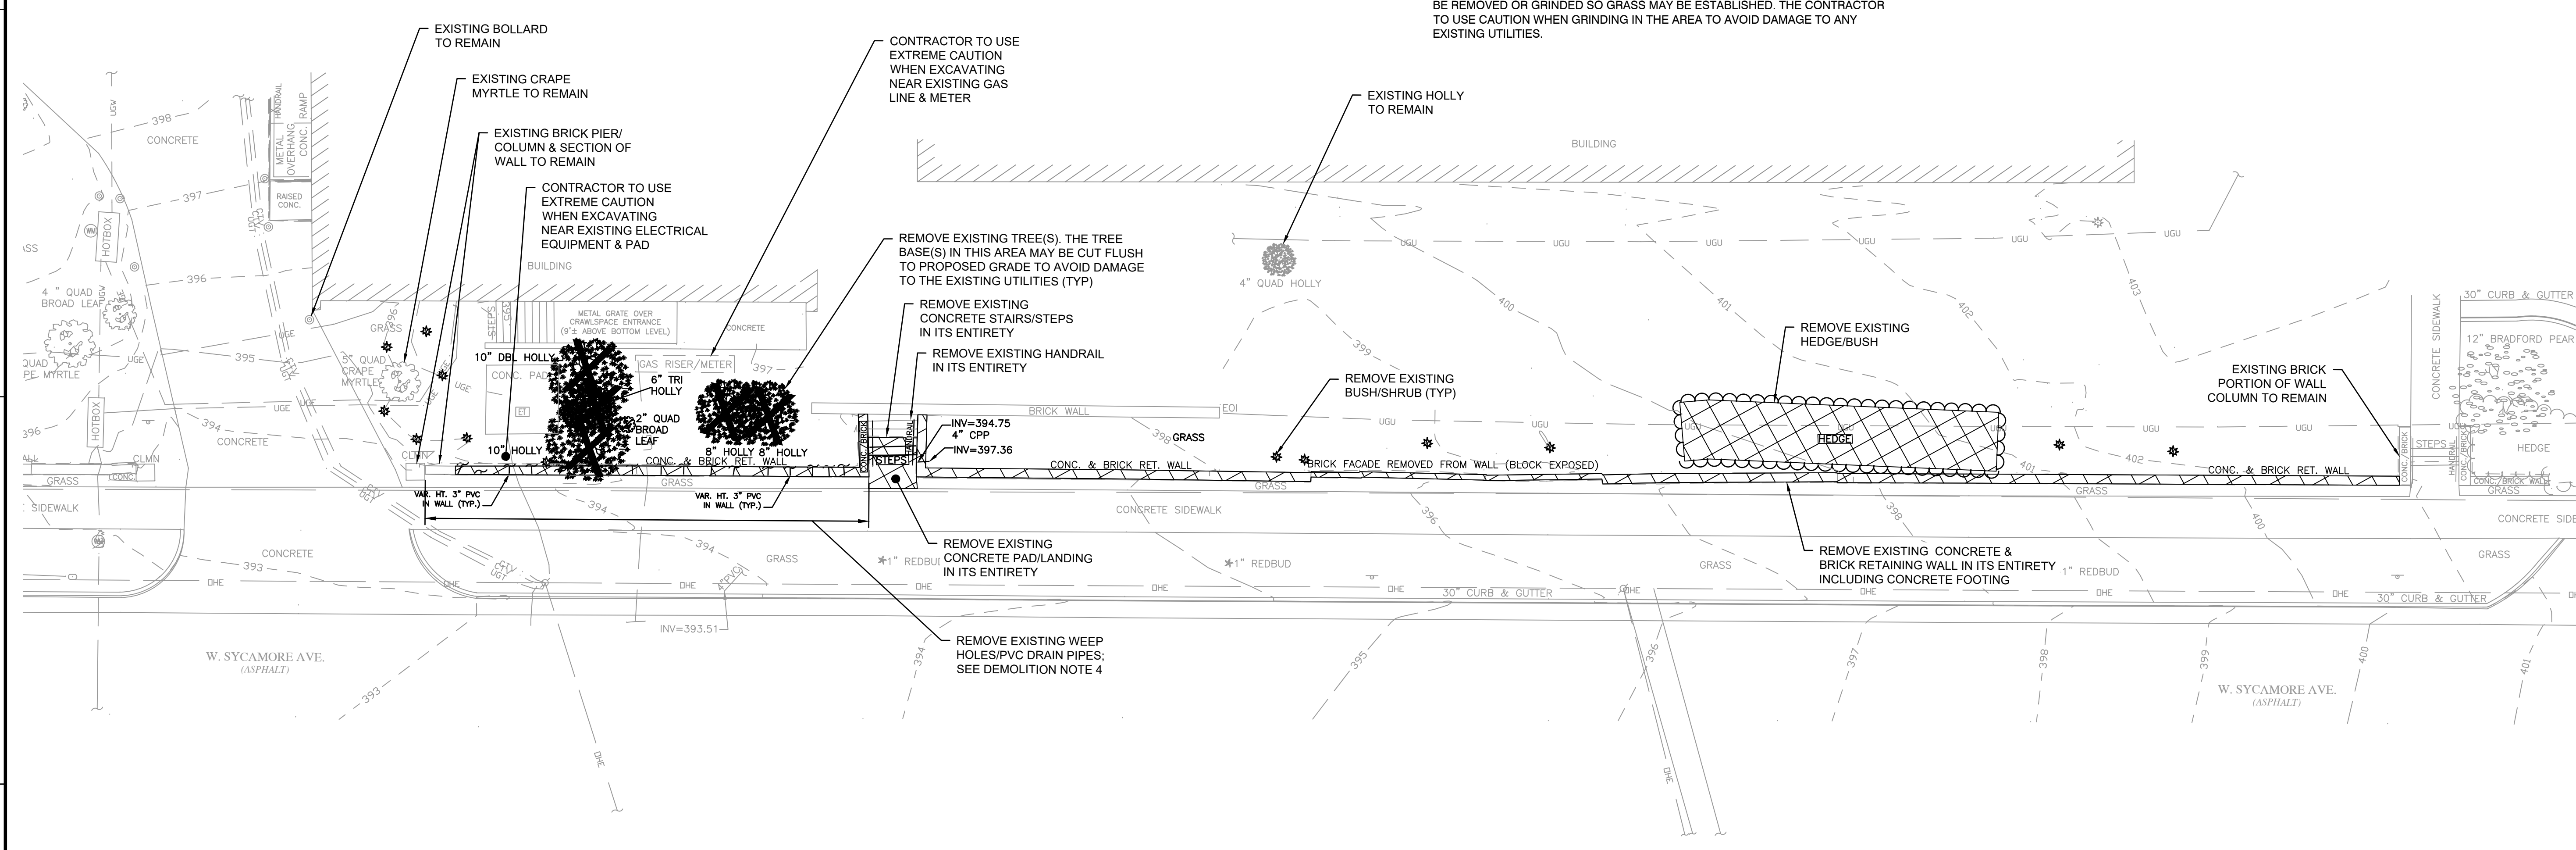

Dewberry Engineers Inc.
2610 WYCLIFF ROAD
SUITE 410
RALEIGH, NC 27607
PHONE: 919.881.9939
FAX: 919.881.9923
NCBELS #F-0929

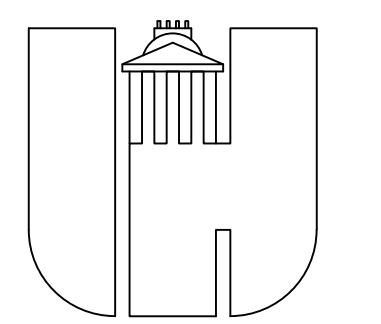

WAKE COUNTY
PUBLIC SCHOOL SYSTEM
RALEIGH, NORTH CAROLINA

WAKE FOREST
ELEMENTARY SCHOOL
RETAINING WALL
REPLACEMENT
136 W. SYCAMORE AVE.
WAKE FOREST, NORTH CAROLINA 27587

SEAL

ADDENDUM #2

SCALE: AS SHOWN

BID DOCUMENTS
NOT FOR CONSTRUCTION

No.	DATE	BY	Description
0	1/22/24	CPR	BID DOCS
REVISIONS			

DRAWN BY TGL
APPROVED BY CPR/AH
CHECKED BY RBR
DATE JANUARY 22, 2024
TITLE

DEMOLITION PLAN

PROJECT NO. 50167130

C101

